


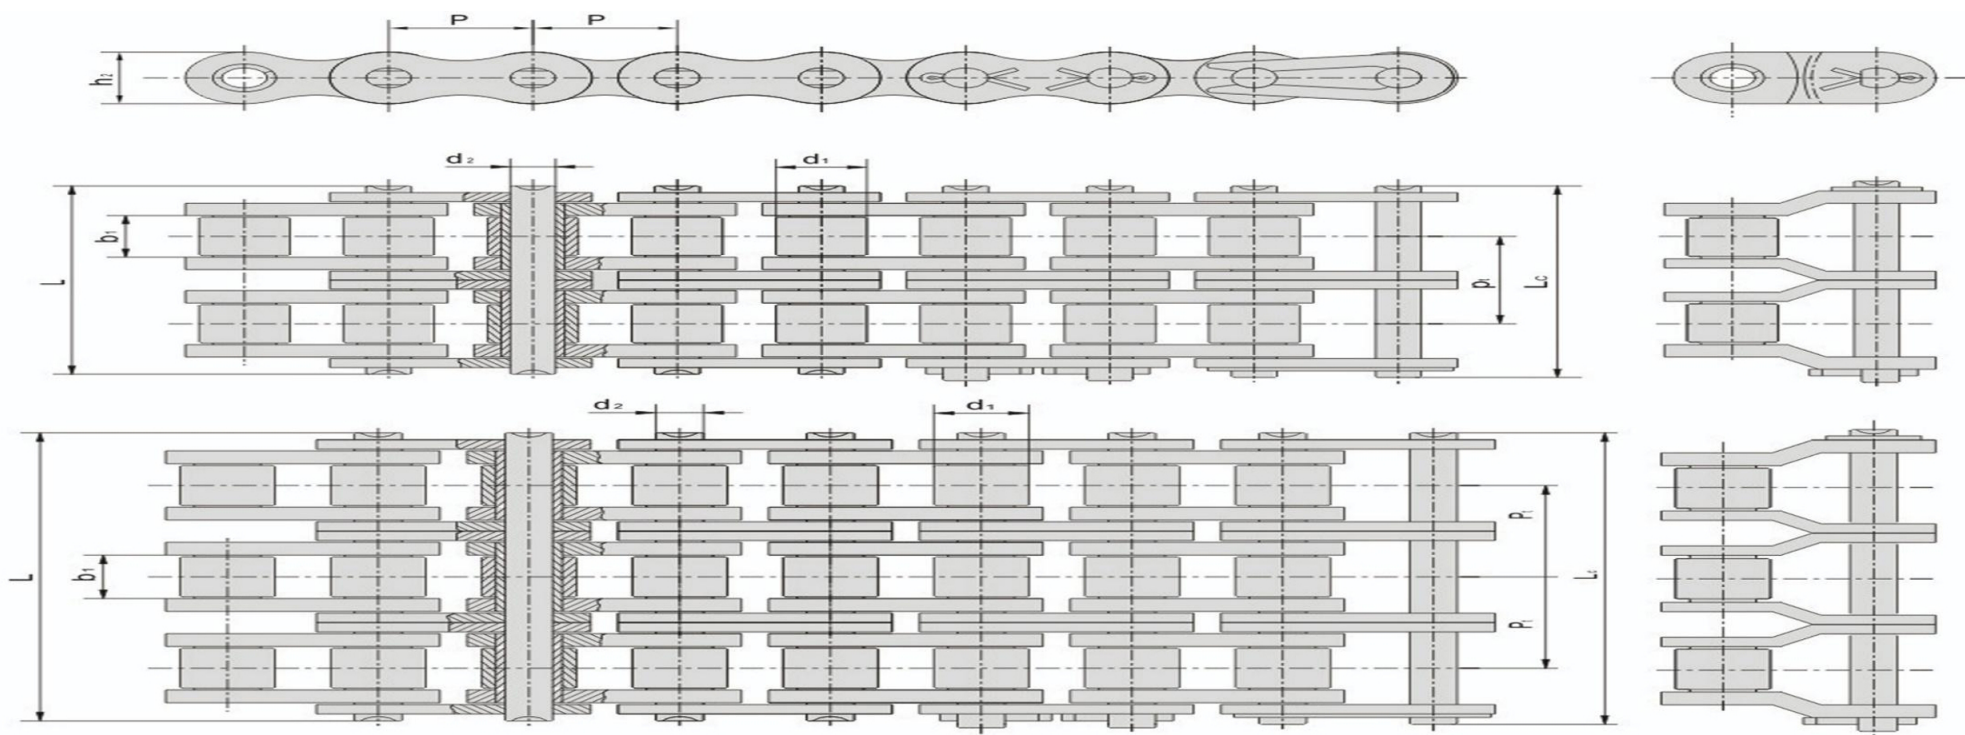

DIN/ISO TÊN XÍCH.	Bước xích	Con lăn	Khe xích	Phi chốt	Dài chốt		Rộng má trong	Tâm hai dây	Lực kéo đứt tối đa	Lực kéo trung bình	Trọng lượng
	P	d1 max	b1 min	d2 max	L max	LC max	h2 max	Pt	KN	KN	kg/m
04B-1	6.0	4	2.8	1.85	6.8	7.1	5	/	3	3.2	0.12
05B-1	8.0	5	3	2.31	8	8.9	7	/	5	5.9	0.19
05B-2					13.7	14.5		5.64	7.8	10.2	0.35
05B-3					19.5	20.2		5.64	11.1	13.8	0.55
06B-1	9.525	6.35	5.72	3.28	13.2	14.2	8.2	/	9	10.4	0.42
06B-2					23.5	24.5		10.24	16.9	18.7	0.81
06B-3					33.8	34.6		10.24	24.9	30.1	1.18
08B-1	12.7	8.51	7.75	4.45	16.5	18	11.8	/	18	19.4	0.71
08B-2					30.6	32		13.92	32	38.7	1.36
08B-3					44.9	46		13.92	47.5	57.8	2.05
10B-1	15.875	10.16	9.65	5.08	19.6	21	14.7	/	22.4	27.5	0.95
10B-2					36.2	37.6		16.59	44.5	56.2	1.89
10B-3					52.8	54.2		16.59	66.7	84.5	2.82
12B-1	19.05	12.07	11.68	5.72	22.5	24	16.1	/	29	32.2	1.24
12B-2					42.1	43.5		19.46	57.8	66.1	2.37
12B-3					61.5	63		19.46	86.7	101.8	3.74
16B-1	25.4	15.88	17.02	8.28	35.6	37.2	21	/	60	72.8	2.84
16B-2					67.5	69.1		31.88	106	133	5.6
16B-3					99.4	101		31.88	160	203.7	8.3
20B-1	31.75	19.05	19.56	10.19	40.8	44.2	26.3	/	95	106.7	4.04
20B-2					77.2	80.7		36.45	170	211.2	7.97
20B-3					113.5	117		36.45	250	290	11.8
24B-1	38.1	25.4	25.4	14.63	53.3	58	33.3	/	160	178	7.14
24B-2					101.6	106.3		48.36	280	319.2	14.1
24B-3					150	154.7		48.36	425	493	21.1
28B-1	44.45	27.94	30.99	15.9	65	70.3	36.8	/	200	222	9.48
28B-2					124.6	129.9		59.56	360	406.8	18.76
28B-3					184.2	189.5		59.56	530	609.5	28.05
32B-1	50.8	29.21	30.99	17.81	65.2	71	42	/	250	227.5	10.19
32B-2					123.8	129.6		58.55	450	508.5	19.69
32B-3					182.4	188.2		58.55	670	770.5	29.46
40B-1	63.5	39.37	38.1	22.89	82.2	89.2	52.96	/	355	394	16.2
40B-2					154.5	161.5		72.29	630	711.9	31.9
40B-3					226.8	233.8		72.29	950	1092.5	47.6
48B-1	76.2	48.26	45.72	29.24	99.1	107	63.8	/	560	621.6	25.52
48B-2					190.3	198.2		91.21	1000	1130	50.45
48B-3					281.6	289.4		91.21	1500	1710	75.4
56B-1	88.9	53.98	53.34	34.32	114.6	123	77.8	/	850	940	35.53
56B-2					221.2	229.6		106.6	1600	1760	70.35
56B-3					327.8	336.4		106.6	2550	2240	106
64B-1	101.6	63.5	60.96	39.4	130.3	140	89.67	/	1120	1240	45.77
64B-2					250.2	260		119.89	2000	2200	91
64B-3					370.1	380		119.89	3000	3300	136
72B-1	114.3	72.39	68.58	44.48	147	156	103.6	/	1400	1550	60.5
72B-2					283	292.3		136.27	2500	2750	120
72B-3					420	429		136.27	3750	4125	179.8