


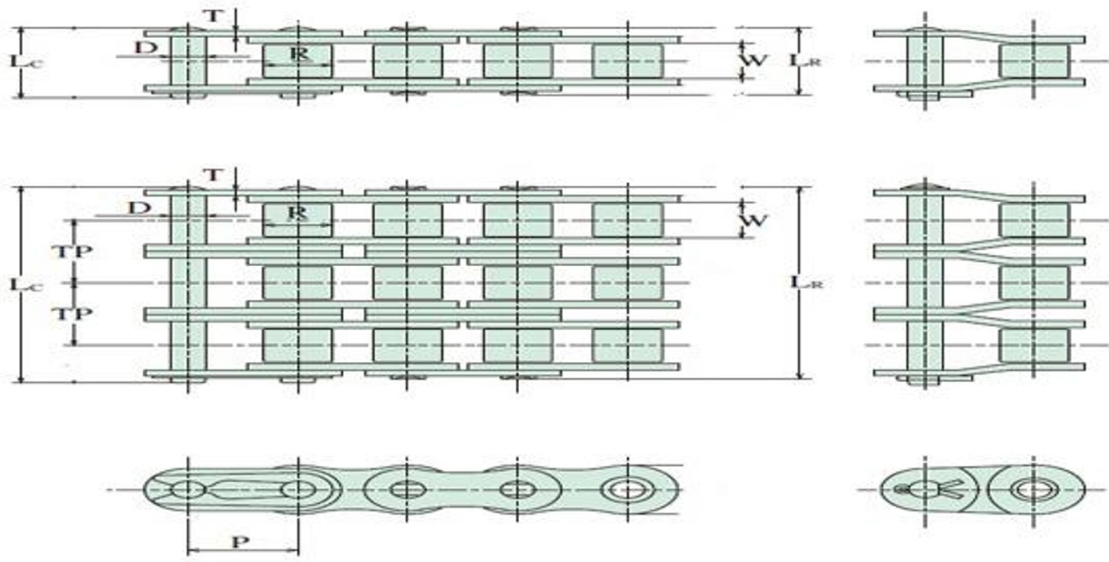

Tên Xích	Bước Xích	Khe Xích	Con Lăn	Phi chốt	Độ dài chốt	Dài chốt khóa	Dày má	Tâm hai dây	Độ bền kéo kgf (KN)	Độ bền kéo trung bình kgf (KN)	Tải trọng tối đa kgf (KN)	Trọng lượng (kg/m)	Số lượng con lăn
	P	W	R	D	Lc	LR	T	TP					
25-1	6.35	3.175	3.302	2.286	8.636	9.398	0.762	0.125006	357 (3.5)	450 (4.4)	65 (0.64)	0.13	480
25-2	6.35	3.175	3.302	2.286	14.986	16.002	0.762	0.242571	714 (7.0)	900 (8.8)	110 (1.08)	0.26	
25-3	6.35	3.175	3.302	2.286	21.336	22.352	0.762	0.366088	1,071 (10.5)	1,350 (13.2)	160 (1.57)	0.39	
35-1	9.525	4.78	5.08	3.59	12.7	14.224	1.25	0.312514	806 (7.9)	1,100 (10.8)	220 (2.16)	0.33	320
35-2	9.525	4.78	5.08	3.59	22.86	24.384	1.25	0.669674	1,612 (15.8)	2,200 (21.6)	370 (3.63)	0.64	
35-3	9.525	4.78	5.08	3.59	33.274	34.554	1.25	1.011951	2,418 (23.7)	3,300 (32.4)	550 (5.39)	0.95	
40-1	12.7	7.9375	7.9248	3.9624	17.018	18.288	1.524	0.610147	1,407 (13.8)	1,850 (18.1)	370 (3.63)	0.61	240
40-2	12.7	7.9375	7.9248	3.9624	31.496	32.766	1.524	1.190531	2,814 (27.6)	3,700 (36.3)	630 (6.17)	1.19	
40-3	12.7	7.9375	7.9248	3.9624	45.72	46.99	1.524	1.785797	4,221 (41.4)	5,550 (54.4)	930 (9.1)	1.79	
40-4	12.7	7.9375	7.9248	3.9624	60.198	61.468	1.524	2.381062	5,628 (55.2)	7,400 (72.6)	1,220 (11.96)	2.38	192
50-1	15.875	9.525	10.16	5.08	21.082	22.606	2.032	1.011951	2,223 (21.8)	3,050 (29.9)	650 (6.37)	1.01	
50-2	15.875	9.525	10.16	5.08	39.37	40.64	2.032	1.964376	4,446 (43.6)	6,100 (59.8)	1,100 (10.79)	2.01	
50-3	15.875	9.525	10.16	5.08	57.404	58.674	2.032	2.946565	6,669 (65.4)	9,150 (89.7)	1,620 (15.89)	2.99	
50-4	15.875	9.525	10.16	5.08	75.438	76.962	2.032	3.928753	8,892 (87.2)	12,200 (119.6)	2,150 (21.08)	3.99	
60-1	19.05	12.7	11.9126	5.9436	26.416	28.194	2.3876	1.473282	3,172 (31.1)	4,200 (41.2)	900 (8.83)	1.49	160
60-2	19.05	12.7	11.9126	5.9436	49.276	51.054	2.3876	2.90192	6,344 (62.2)	8,400 (82.4)	1,530 (15.00)	2.95	
60-3	19.05	12.7	11.9126	5.9436	72.136	73.914	2.3876	4.285912	9,516 (93.3)	12,600 (123.6)	2,250 (22.05)	4.41	
60-4	19.05	12.7	11.9126	5.9436	94.996	96.774	2.3876	5.803839	12,688 (124.4)	16,800 (164.5)	2,950 (28.93)	5.83	
60-5	19.05	12.7	11.9126	5.9436	117.856	119.634	2.3876	7.396175	15,860 (155.5)	21,000 (205.8)	3,500 (34.32)	7.32	
80-1	25.4	15.875	15.875	7.9248	33.528	36.576	3.175	2.574524	5,670 (55.6)	7,400 (72.6)	1,500 (14.71)	2.5	120
80-2	25.4	15.875	15.875	7.9248	62.738	65.786	3.175	5.015112	11,340 (111.2)	14,800 (145.0)	2,550 (25.0)	4.96	
80-3	25.4	15.875	15.875	7.9248	91.948	94.996	3.175	7.470583	17,010 (166.8)	22,200 (217.7)	3,750 (36.77)	7.40	
80-4	25.4	15.875	15.875	7.9248	121.666	124.46	3.175	10.01534	22,680 (222.4)	29,600 (290.3)	4,950 (48.54)	9.84	
80-5	25.4	15.875	15.875	7.9248	150.876	153.924	3.175	12.50058	28,350 (278.0)	37,000 (362.8)	5,850 (57.37)	12.29	
100-1	31.75	19.05	19.05	9.525	40.894	43.942	3.9624	3.735291	8,841 (86.7)	11,500 (112.8)	2,300 (22.56)	3.85	96
100-2	31.75	19.05	19.05	9.525	76.708	79.756	3.9624	3.735291	17,682 (173.4)	23,000 (225.6)	3,900 (38.25)	7.62	
100-3	31.75	19.05	19.05	9.525	112.522	115.824	3.9624	3.735291	26,523 (260.1)	34,500 (338.3)	5,750 (56.39)	11.38	
100-4	31.75	19.05	19.05	9.525	148.339	151.638	3.9624	3.735291	35,364 (346.8)	46,000 (451.1)	7,550 (74.04)	15.15	
100-5	31.75	19.05	19.05	9.525	184.15	187.452	3.9624	3.735291	44,205 (433.5)	57,500 (563.9)	8,950 (87.72)	18.91	
120-1	38.1	25.4	22.225	11.0998	50.8	54.356	4.7498	5.491325	12,706 (124.6)	16,000 (156.9)	3,100 (30.40)	5.66	80
120-2	38.1	25.4	22.225	11.0998	96.266	99.882	4.7498	10.938	25,412 (249.2)	32,000 (313.7)	5,250 (51.48)	11.21	
120-3	38.1	25.4	22.225	11.0998	141.732	145.288	4.7498	16.51862	38,118 (373.8)	48,000 (470.6)	7,750 (76.00)	19.74	
120-4	38.1	25.4	22.225	11.0998	187.452	191.008	4.7498	21.87601	50,824 (498.4)	64,000 (627.6)	10,200 (100.03)	22.28	
120-5	38.1	25.4	22.225	11.0998	232.918	236.474	4.7498	27.42686	63,530 (623.0)	80,000 (784.5)	12,050 (118.17)	27.83	
140-1	44.45	25.4	25.4	12.7	54.536	58.674	5.5626	7.44082	17,233 (169.0)	21,500 (210.8)	4,100 (40.21)	7.19	68
140-2	44.45	25.4	25.4	12.7	103.378	107.696	5.5626	14.36078	34,466 (338.0)	43,000 (421.7)	6,750 (66.19)	14.24	
140-3	44.45	25.4	25.4	12.7	152.4	156.464	5.5626	21.28074	51,699 (507.0)	64,500 (632.5)	10,250 (100.52)	2130	
160-1	50.8	31.75	28.575	14.2748	64.516	69.342	6.35	9.71771	22,678 (222.4)	27,500 (269.7)	5,400 (52.96)	9.63	60
160-2	50.8	31.75	28.575	14.2748	123.19	128.016	6.35	19.09314	86,056 (844.8)	55,000 (539.4)	9,150 (89.73)	19.06	
160-3	50.8	31.75	28.575	14.2748	181.864	186.69	6.35	28.31976	103,34 (667.2)	82,500 (809.0)	13,500 (132.39)	28.50	
180-1	57.15	35.71875	35.7124	17.4498	73.152	80.01	7.1374	13.48276	-	-	-	-	53
180-2	57.15	35.71875	35.7124	17.4498	139.192	146.05	7.1374	26.29586	-	-	-	-	
180-3	57.15	35.71875	35.7124	17.4498	204.978	211.836	7.1374	38.98989	-	-	-	-	
200-1	63.5	38.1	39.6748	19.8374	79.248	87.376	7.9248	15.84895	51,027 (500.4)	70,000 (686.5)	10,100 (99.05)	24.5	48
200-2	63.5	38.1	39.6748	19.8374	150.876	159.004	7.9248	31.99552	70,768 (694.0)	96,000 (941.4)	12,400 (121.60)	31.59	
200-3	63.5	38.1	39.6748	19.8374	222.504	230.632	7.9248	48.06769	106,152 (1041.0)	144,000 (1412.2)	18,250 (178.97)	47.29	
240-1	76.2	47.625	47.625	23.7998	95.504	105.41	9.525	24.49518	51,027 (500.4)	70,000 (686.5)	10,100 (99.05)	24.5	40
240-2	76.2	47.625	47.625	23.7998	186.388	193.394	9.525	48.21651	102,054 (1000.2)	140,000 (1372.9)	17,150 (168.18)	48.10	
240-3	76.2	47.625	47.625	23.7998	271.78	281.686	9.525	72.92003	153,081 (1501.8)	210,000 (2059.4)	25,250 (247.62)	71.61	
240-4	76.2	47.625	47.625	23.7998	359.156	369.316	9.525	95.24249	204,108 (2001.6)	280,000 (2745.9)	33,300 (326.56)	95.11	